


Product Data Sheet

Type : Contactor EW
 Reference : EW050_



Main Contact:

Rated Insulation Voltage Ui (V)			660	
Rated Service Voltage (V)			660	
Thermal Current Ith AC1 (A)			70	
Rated Current cat. AC3 Ie	1P	110V	A	KW
		220V	-	-
		220/230V	-	-
	3P	220/230V	55	15
		380/400V	55	25
		415/440V	52	30
		500V	45	30
		600V	35	30

Auxiliary Contact:

Rated Insulation Voltage Ui (V)			690	
Rated Service Voltage (V)			600	
Thermal Current Ith AC1 (A)			10/2.5	
Rated Current cat. AC3 Ie	AC 15	120V	6	
		240V	3	
		380V	1.9	

Contactor Endurance:

Operations Freq.	Cycles / Hour	1200
Elect. Endurance	x 10000 cycles	100
Mech. Endurance	x 10000 cycles	1000


Coils:

Coils	Inrush (VA)	280
	Rated (VA)	25
	Power Loss (W)	7,5

Others:

Auxiliary Contacts	1NA + 2NF
Weight (Kg)	1,3

Dimensions (mm):

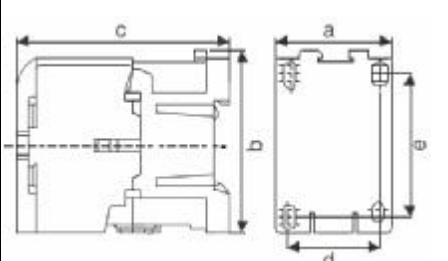	a	93,5
	b	116
	c	123
	d	80
	e	90