


Product Data Sheet

Type : Contactor EW
 Reference : EW150_



Main Contact:

Rated Service Voltage (V)			690	
Thermal Current Ith AC1 (A)			200	
Rated Current cat. AC3 Ie			A	KW
	1P	110V	-	-
		220V	-	-
	3P	220/230V	150	45
		380/400V	147	80
		415/440V	131	80
		500V	129	90
		600V	107	100

Auxiliary Contact:

Rated Insulation Voltage Ui (V)			660	
Rated Service Voltage (V)			660	
Thermal Current Ith AC1 (A)			10/2.5	
Rated Current cat. AC3 Ie	AC 15	120V	6	
		240V	3	
		380V	1.9	

Contactor Endurance:

Operations Freq.	Cycles / Hour	1200
Elect. Endurance	x 10000 cycles	100
Mech. Endurance	x 10000 cycles	1000


Coils:

Coils	Inrush (VA)	700
	Rated (VA)	70
	Power Loss (W)	35

Others:

Auxiliary Contacts	2NA+2NF
Weight (Kg)	4,1

Dimensions (mm):

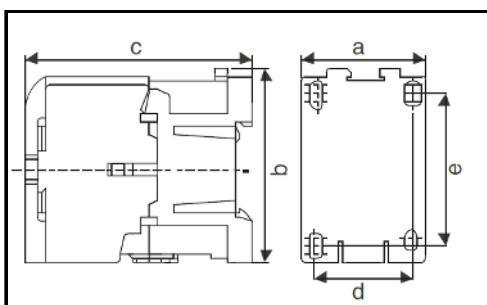	a	130
	b	180
	c	152,2
	d	100
	e	130